

HL-1PD

GPON ONT

1x Gigabit LAN Port

SFU and HGU support

Advanced VLAN operation

PoE PD (Powered Device)



Product Description


HALNy GPON Gateway are innovative and powerful product for business and residential subscribers.

All products within the GPON family comply with current ITU-T standards for gigabit passive optical networks (GPONs). The solution is designed to optimize the deployment and roll-out of the service provider. HL-1PD design offers multi-interoperability with several OLT vendors. The ONT/ONU products are tested and have proven interoperability with most major GPON OLT Vendors.

HALNy HL-1PD provides one GPON port (SC/APC type) and one Gigabit Ethernet port. LAN port can be used for data and power delivery to the ONT (Support **Power Over Ethernet PD - Powered Device**). It can be installed on the places where there is not possible to use power supply. ONT supports HGU (Home Gateway Unit – L3 / Router / NAT) and SFU mode (Single Family Unit) – bridge with advanced VLAN operation via OMCI.

HALNy specializes in cost-effective designs and works closely with service providers to improve their business case through a comprehensive range of standard products, supporting the industry's common demands. HALNy also provides custom designs and services to meet unique customer needs.

Housing can be sold with the Operator logo on the top cover.

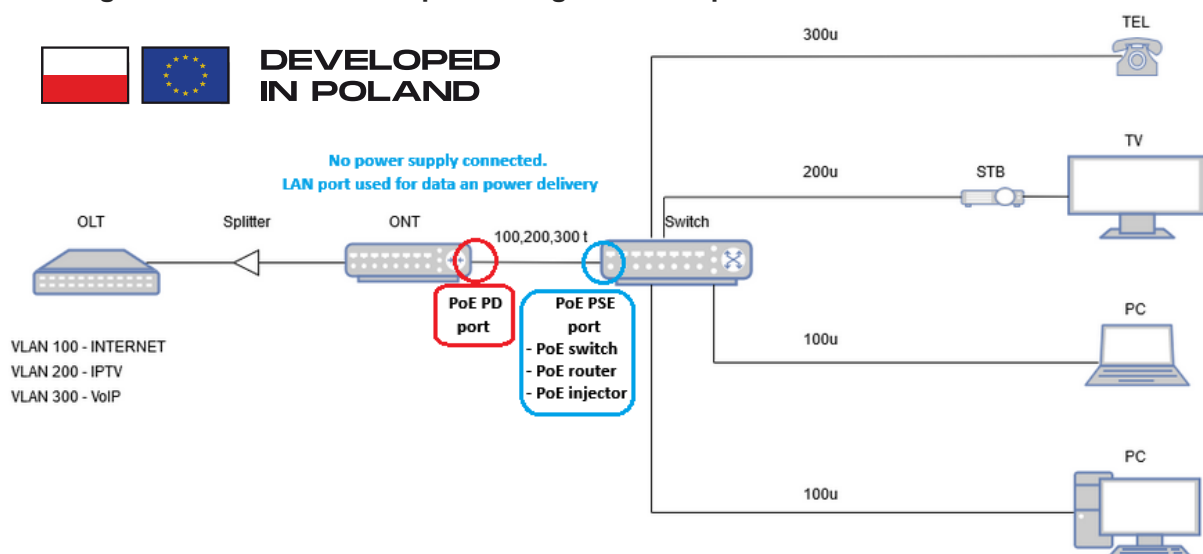

supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.



Hardware Specification

Flash / RAM	128MB / 256MB	Storage Temp.	-20°C~70°C (-4F~158F)
CPU	Dual Core 1GHz	Operating Temp.	0°C~45°C (32F~113F)
WAN Port	GPON B+ SC/APC 2.488Gbps Downstream 1.244Gbps Upstream	Operating Humidity	5% ~ 95% (non-condensing)
GPON Tx	0.5 ~ 5 dBm	Power Supply	DC +12V / 1.0A
GPON Rx	-10 ~ -27 dBm	Buttons	ON/OFF Power, Reset
LAN Ports	1x 10/1000/1000BASE-T (RJ-45) Auto-sensing, auto-detection MDI/ MDI-X	Dimension (W x D x H)	140 x 102 x 34mm
LED	POWER, PON, LOS, LAN	Power Over Ethernet	Powered Device (PD) 802.3af PoE

Software Specification

GPON	ITU-T G.984.x and G.988 OMCI G.984.4 / G.988 AES / FEC / DBA Dying GASP Multicast GEM	L3 (HGU Mode)	Router / NAT / PAT PPPoE / DHCP Client Static IP DHCP Server IGMP Proxy VPN Pass-through UPnP DMZ / Port Forwarding IPv4 / IPv6 IPv6 Dual Stack IPv6 DS-Lite IPv6 Firewall RFC-6092
L2	802.1D Bridge VLAN 802.1Q with 802.1p CoS IGMP Snooping v1/v2/v3 Jumbo Frame 2K Rate-Limit (Traffic Limitation) Bridge filter Roque DHCP Server filter	Provisioning	Easy-to-use provisioning for all ONT configuration DOCSIS like provisioning over GPON/EPON TR-069 OMCI OTT Upgrade DHCP 66/67 XML RestAPI / JSON
VLAN (SFU Mode)	Advanced VLAN operation: (access, transparent, translation, QinQ, Selective QinQ, Hybrid)		
Management	WEB (two user accounts) Remote Syslog OMCI		

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.




Interoperability Test Result

NOKIA (Alcatel-Lucent)	Cisco/Altice
DZS	FIBERHOME
ZTE	RAISECOM
HUAWEI	ZYXEL
CALIX	ZHONE
ADTRAN	ISKRATEL

Ordering Information

HL-1PD / HL-1PD-EU	HALNY NETWORKS GPON ONT 1-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, PoE PD (Powered Device) , with European Power Adapter
HL-1PD-US	HALNY NETWORKS GPON ONT 1-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, PoE PD (Powered Device) , with North America Power Adapter
HL-1PD-UK	HALNY NETWORKS GPON ONT 1-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, PoE PD (Powered Device) , with United Kingdom Power Adapter
HL-1PD-NOPS	HALNY NETWORKS GPON ONT 1-PORT LAN 10/100/1000, B+ SC/APC, Router/Bridge, PoE PD (Powered Device) , without Power Adapter

Please **contact sales** for detailed order information

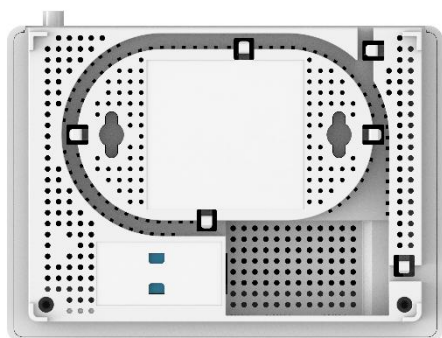

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.