

HALNY

High Availability Local Networks

HL-4GV

GPON ONT
4x Gigabit LAN Port
SFU and HGU support
Advanced VLAN operation
With VoIP



Product Description

HALNy GPON Gateway are innovative and powerful product for business and residential subscribers.

All products within the GPON family comply with current ITU-T standards for gigabit passive optical networks (GPONs). The solution is designed to optimize the deployment and roll-out of the service provider. HL-4GV design offers multi-interoperability with several OLT vendors. The ONT/ONU products are tested and have proven interoperability with most major GPON OLT Vendors.


HALNy HL-4GV provides one GPON port (SC/APC type), four Gigabit Ethernet ports and two FXS ports for VoIP. ONT supports HGU (Home Gateway Unit – L3 / Router / NAT) and SFU mode (Single Family Unit) – bridge with advanced VLAN operation via OMCI.

HALNy specializes in cost-effective designs and works closely with service providers to improve their business case through a comprehensive range of standard products, supporting the industry's common demands. HALNy also provides custom designs and services to meet unique customer needs.

Housing can be sold with the Operator logo on the top cover.



**DEVELOPED
IN POLAND**

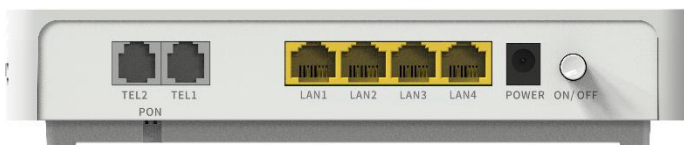

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.

www.halny.com

FIBRAIN Sp. z o.o.
36-062 Zaczernie 190F
Poland

phone
e-mail

+48 17 866 08 00
sales@halny.com
support@halny.com



Hardware Specification

Flash / RAM	128MB / 256MB	Storage Temp.	-20°C~70°C (-4F~158F)
CPU	Dual Core 900MHz	Operating Temp.	0°C~45°C (32F~113F)
WAN Port	GPON B+ SC/APC 2.488Gbps Downstream 1.244Gbps Upstream	Operating Humidity	5% ~ 95% (non-condensing)
GPON Tx	0.5 ~ 5 dBm	Power Supply	DC +12V / 1.5A
GPON Rx	-10 ~ -27 dBm	Buttons	ON/OFF Power, Reset
LAN Ports	4 x 10/100/1000BASE-T (RJ-45) Auto-sensing, auto-detection MDI/ MDI-X	Dimension (W x D x H)	185 x 125 x 36mm
TEL PORTS	2 x FXS, RJ11	LED	POWER, PON, LOS, NET LAN1, LAN2, LAN3, LAN4, TEL1, TEL2

Software Specification

GPON	ITU-T G.984.x and G.988 OMCI G.984.4 / G.988 AES / FEC / DBA Dying GASP Multicast GEM	L3 (HGU Mode)	Router / NAT / PAT PPPoE / DHCP Client Static IP DHCP Server IGMP Proxy VPN Pass-through UPnP DMZ / Port Forwarding IPv4 / IPv6 IPv6 Dual Stack IPv6 DS-Lite IPv6 Firewall RFC-6092
L2	802.1D Bridge VLAN 802.1Q with 802.1p CoS IGMP Snooping v1/v2/v3 Jumbo Frame 2K Rate-Limit (Traffic Limitation) Bridge filter Roque DHCP Server filter	Provisioning	Easy-to-use provisioning for all ONT configuration DOCSIS like provisioning over GPON/EPON TR-069 OMCI OTT Upgrade DHCP 66/67 XML RestAPI / JSON
VLAN (SFU Mode)	Advanced VLAN operation: (access, transparent, translation, QinQ, Selective QinQ, Hybrid)		
Management	WEB (two user accounts) Remote Syslog OMCI		
Telephony	SIP, DTMF, Dial Plan		

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.



Interoperability Test Result

NOKIA (Alcatel-Lucent)	Cisco/Alti ce
DZS	FIBERHOME
ZTE	RAISECOM
HUAWEI	ZYXEL
CALIX	ZHONE
ADTRAN	ISKRATEL

Ordering Information

HL-4GV / HL-4GV-EU	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, 2XPOTS, Router/Bridge, with European Power Adapter
HL-4GV-US	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, 2XPOTS, Router/Bridge, with North America Power Adapter
HL-4GV-UK	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, 2XPOTS, Router/Bridge, with United Kingdom Power Adapter
HL-4GV-NOPS	HALNY NETWORKS GPON ONT 4-PORT LAN 10/100/1000, B+ SC/APC, 2XPOTS, Router/Bridge, without Power Adapter

Please **contact sales** for detailed order information



All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers. Actual data throughput and Wi-Fi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, resulting in lower actual data throughput and wireless coverage. Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.